RL78/G10

Multiplication and Division Program

R01AN1976EJ0200
Rev. 2.00
Mar. 31, 2015

Introduction

This application note explains the program which realizes multiplication and division of unsigned integer using RL78/G10.

A program is shown about three kinds of arithmetic processing (16bit×16bit, 16bit×16bit+32bit, and 32bit÷32bit).

Target Device

RL78/G10

When applying the sample program covered in this application note to another microcomputer, modify the program according to the specifications for the target microcomputer and conduct an extensive evaluation of the modified program.

Contents

1. Specifications 3
2. Operation Check Conditions 3
3. Description of Software 4
3.1 Operation Outline 4
3.2 The Way of Thinking of Multiplication 4
3.3 The Way of Thinking of Division 4
3.4 Signed Data Handling 6
3.5 List of Constants 6
3.6 List of Variables 7
3.7 List of Functions (Subroutine) 7
3.8 Function (Subroutine) Specifications 7
3.9 Flowcharts 9
3.9.1 Main Processing 9
3.9.2 Multiplication Processing of 16 Bits Data 10
3.9.3 Multiply and Accumulation Processing 11
3.9.4 Division Processing of 32 Bits 12
4. Sample Code 13
5. Documents for Reference 13

1. Specifications

In this application note, an actual program and its usage are shown from the view of operation for three kinds of arithmetic processing subroutines (16bit×16bit, 16bit×16bit+32bit, and 32bit÷32bit).

Table 1.1 shows the arithmetic processing objected in this application note.

Table 1.1 Targeted Arithmetic Processing

Arithmetic Processing	Description
16bit×16bit	Multiplication of unsigned integers of 16-bit data.
16bit×16bit+32bit	Multiply and accumulation of unsigned integers of 16-bit data. The overflow flow is not detected from 32-bit data.
32bit÷32bit	The division processing of unsigned integers of 32-bit data.

2. Operation Check Conditions

The sample code described in this application note has been checked under the conditions listed in the table below.

Table 2.1 Operation Check Conditions

Item	Description
Microcontroller used	RL78/G10 (R5F10Y16ASP)
Operating frequency	• High-speed on-chip oscillator (HOCO) clock: 20 MHz • CPU/peripheral hardware clock: 20 MHz
Operating voltage	5.0 V (can run at a voltage range of 2.9 V to 5.5 V.) SPOR detection voltage: V_{SPOR} = 2.90 V（TYP.）、V_{SPDR} = 2.84 V（TYP.） When reset occurs: V_{DD} < 2.84 V When reset is released: V_{DD} ≥ 2.90 V
Integrated development environment (CS+)	CS+ for CA,CX V3.00.00 from Renesas Electronics Corp.
Assembler (CS+)	RA78K0R V1.70 from Renesas Electronics Corp.
Integrated development environment (e2studio)	e2studio V3.1.2.10 from Renesas Electronics Corp.
Assembler (e2studio)	KPIT GNURL78-ELF Toolchain V14.03 from Renesas Electronics Corp.
Integrated development environment (IAR)	IAR Embedded Workbench for Renesas RL78 V1.40.5
Assembler (IAR)	IAR Assembler for Renesas RL78 V1.40.5
Operating environment	RL78/G10 Simulator

3. Description of Software

3.1 Operation Outline

In the arithmetic processing of this application note, specified operation is performed to the data stored in the variable arranged to a short direct area, and the result is set to the variable arranged to the short direct area.

3.2 The Way of Thinking of Multiplication

Calculation is performed by dividing large data into a small digit as well as the way of the usual computation on paper.

In this case, attention is necessary for digit place (figure). Here, a calculation of hexadecimal numbers of $A_1A_2A_3A_4$ x $B_1B_2B_3B_4$ is shown as an example. As the calculation method, the 8-bit multiply instruction "MULU X command" is used. Calculates in 4 steps of every 2 digits (8 bits) (multiplication); $A_1A_2 \times B_1B_2$, $A_1A_2 \times B_3B_4$, $A_3A_4 \times B_1B_2$, $A_3A_4 \times B_3B_4$, and 4 times of calculation results are added with attention to digit place.

This system is shown in Figure 3.1. Thus, an answer can be obtained by adding in consideration of the digit of 4 times of calculation results. Here, although a multiplicand and a multiplier are 4 digits (16 bits), if they are beyond 4 digits (16 bits), they are calculable similarly by adding the calculation results of every double figure with attention to digit place.

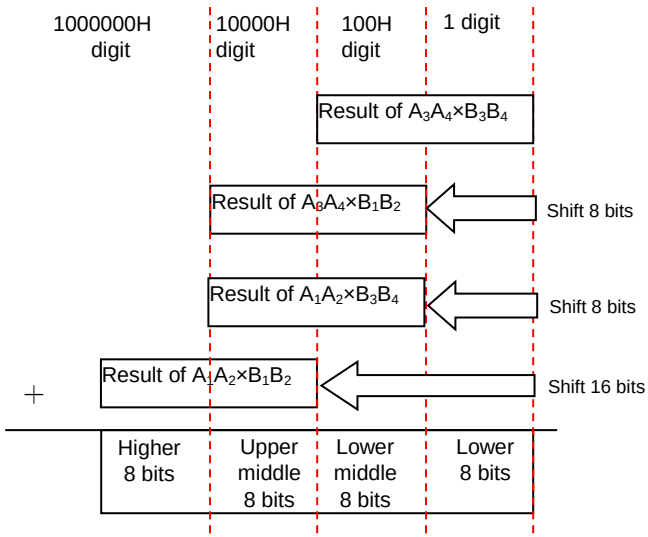

Figure 3.1 Data Scaling of 16 bits×16 bits

3.3 The Way of Thinking of Division

RL78/G10 does not have a division command. Moreover, the multiplier and divider/multiply-accumulator circuit is not carried, either. Therefore, it is necessary to repeat subtraction processing in order to realize division.

The simplest method is making a quotient the number of times that was able to subtract a divisor from a dividend. However, by such a simple method, processing time will be long.

It is common to shorten the processing time by repeating subtraction for the number of the bits of the dividend while shifting a dividend by 1 bit. With division of 16 bits ÷ 16 bits as an example, this method is explained like below.

(1) In order to execute division by repeating subtraction, the work area of the same bit length as a divisor is prepared at higher bits of a dividend and cleared by zero. (Refer to Figure 3.2)

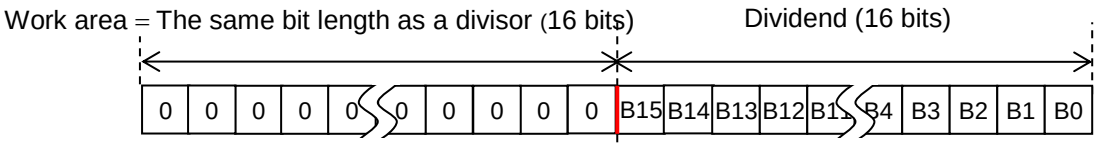

Figure 3.2 Pre-preparation of Calculation

(2) In subtraction processing, a dividend and work area is shifted 1 bit to the left at a time first as the preparation of subtraction. The MSB of dividend is set to the LSB of work area, and the LSB of dividend becomes 0. (Refer to Figure 3.3). The LSB of dividend is used as an area for the quotient in order to obtain the efficiency of processing and domain.

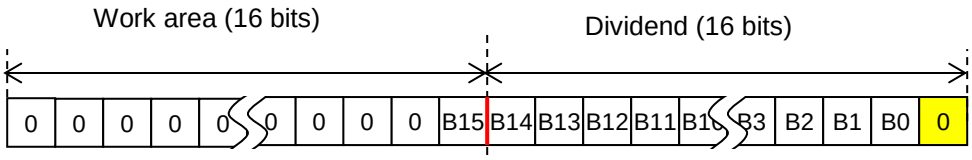

Figure 3.3 Preparation of subtraction

(3) Whether a divisor is able to be subtracted from the work area is confirmed. If subtraction is possible, the quotient of the time becomes 1 and becomes 0 if impossible. This quotient is stored in LSB of a dividend (domain). The remainder at the time of being over is stored in work area. (Refer to Figure 3.4)

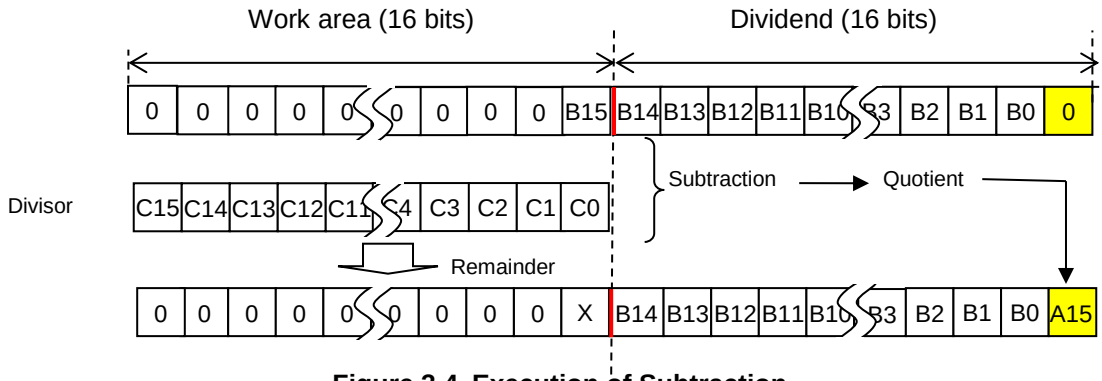
Work area (16 bits)
Dividend (16 bits)
0 0 0 0 0 0 0 0 0 B15 B14 B13 B12 B11 B10 B3 B2 B1 B0 0
Divisor
C15 C14 C13 C12 C11 C4 C3 C2 C1 C0
Subtraction
Quotient
Remainder
0 0 0 0 0 0 0 0 0 X B14 B13 B12 B11 B10 B3 B2 B1 B0 A15

Figure 3.4 Execution of Subtraction

The notes in this calculation are the column numbers of a quotient. After shifting a bit to the left, it subtracts and the quotient is certainly stored in LSB of a dividend area each time. And when both (2) and (3) are performed, the subtraction processing for 1 bit had completed. In the case of Figure 3.4, the quotient bit A15 stored in LSB of a dividend has bit weights of the 15th power of 2. Then, it is stored in the right (lower side) of A15 in order of lighter bit weights by repeating (2) and (3).

(4) The work area and the dividend of a result which performed (2) and (3) for the following digits are shown in Figure 3.5.

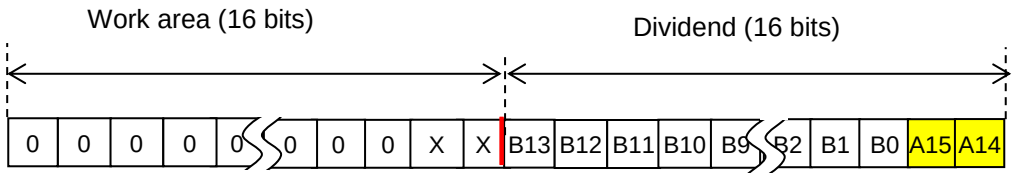

Figure 3.5 The Second Execution Result

(5) The work area and dividend that are results of the 3rd shift and subtraction are shown in Figure 3.6.

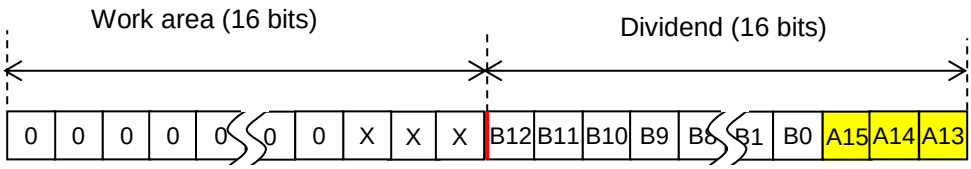

Figure 3.6 The Third Execution Result

(6) The work area and dividend that are results of having repeated the same shift and subtraction 16 times are shown in Figure 3.7. Here, a surplus is stored in work area and a quotient is stored in a dividend.

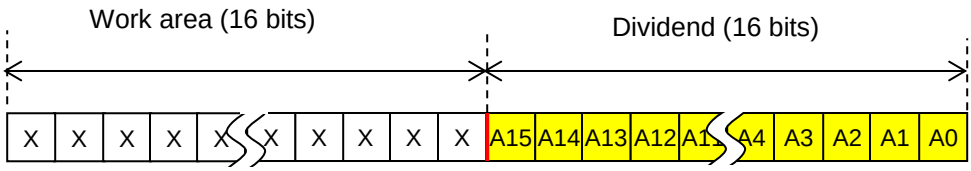

Figure 3.7 The 16th Execution Result

Thus, when a dividend and a quotient share the same area, shift processing can also be shared and a program will be shorter. And since the command to execute decreases, the speed of processing can also be faster.

Although the above example was a case of 16-bit data, the same view is made even if it is 32-bit data.

3.4 Signed Data Handling

A sign is checked first in order to handle signed data for the multiplication and division. In the case of a negative number, after memorizing the sign to a flag, an absolute value is obtained by taking the complement of 2 to data. Arithmetic processing is performed in the obtained absolute value. The combination of the sign of two data is checked, and a result is made into a value with a sign if required.

3.5 List of Constants

Table 3.1 lists the constants for the sample program.

Table 3.1 Constants for the Sample Program

Constant	Setting	Description
DNMULC	16/8	The number of bytes of a multiplicand (16 bits)
DNMUL	16/8	The number of bytes of a multiplier (16 bits)
DNRES	DNMUL + DNMULC	The number of bytes of the result area (32 bits)
DNdivS	32/8	The number of bytes of a divisor (32 bits)
DNdivD	32/8	The number of bytes of a dividend (32 bits)
DNQUO	DNdivD×8	The number of times of calculation

3.6 List of Variables

Table 3.2 lists variables that are used in this sample program.

Table 3.2 Variables for the Sample Program

Variable Name	Description
RREG0	Multiplicand area/Lower part of divisor area
RREG1	Multiplier area/Upper part of divisor area
RREG2	Multiplication result area/Product-sum addition area/Dividend and quotient area
RREG3	Work and remainder area

3.7 List of Functions (Subroutine)

Table 3.3 lists the functions that are used in this sample program.

Table 3.3 List of Functions (Subroutine)

Functions (Subroutine) Name	Description
M16bitX16bit	Multiplication of 16-bit data (unsigned)
M16bitA32bit	16-bit data is multiplied and the result is added to 32-bit data. (unsigned)
D32bit_32bitS	Division of 32-bit data (unsigned, divisor checked)
D32bit_32bitS2	Division of 32-bit data (unsigned, no divisor check)

3.8 Function (Subroutine) Specifications

This section describes the specifications for the functions (subroutine) that are used in the sample program.

[Function Name] M16bitX16bit

Synopsis	Multiplication of 16-bit data (unsigned)	
Explanation	Multiplies the multiplicand stored in RREG0 by multiplier stored in RREG1, and its result will be stored in RREG2.	
Arguments	RREG0	Multiplicand (16 bits)
	RREG1	Multiplier (16 bits)
Return value	RREG2	Product (32 bits)
Remarks	Registers to be used	A, X, B, C
	Stacks to be used	4+4 bytes

[Function Name] M16bitA32bit

Synopsis	Multiplies 16-bit data by 16-bit data, and the result is added to 32-bit data. (unsigned)	
Explanation	Adds the multiplication result of data stored in RREG0 and RREG1 on RREG2.	
Arguments	RREG0	Multiplicand (16 bits)
	RREG1	Multiplier (16 bits)
	RREG2	Augend (32 bits)
Return value	RREG2	Product-sum (32 bits)
Remarks	Registers to be used	A, X, B, C
	Stacks to be used	4+4 bytes

[Function Name] D32bit_32bitS

Synopsis	Division of 32-bit data (unsigned, divisor checked)	
Explanation	Confirms whether a divisor is 0, and if it is 0, returns in an error. If a divisor is not 0, division is done for the data of RREG2 by the data of RREG0, and a quotient will be stored in RREG2, a remainder will be stored in RREG3.	
Arguments	RREG0	Divisor (lower 16 bits)
	RREG1	Divisor (higher 16 bits)
	RREG2	Dividend (32 bits)
Return value	RREG2	Quotient (32 bits)
	RREG3	Remainder (32 bits)
	Carry flag	0: Normal termination
		1: Error (Divisor is 0.)
Remarks	Registers to be used	A, X, B, C, L
	Stacks to be used	4 bytes (only for CALL command)

[Function Name] D32bit_32bitS2

Synopsis	Division of 32 bits data (unsigned, no divisor check)	
Explanation	Divides the data of RREG2 by the data of RREG0. And then a quotient is stored in RREG2, and a remainder is stored in RREG3. (The divisor check of D32bit_32bitS is omitted.)	
Arguments	RREG0	Divisor (lower 16 bits)
	RREG1	Divisor (higher 16 bits)
	RREG2	Dividend (32 bits)
Return value	RREG2	Quotient (32 bits)
	RREG3	Remainder (32 bits)
	Carry flag	0: Normal termination
Remarks	Registers to be used	A, X, B, C, L
	Stacks to be used	4 bytes (only for CALL command)

3.9 Flowcharts

3.9.1 Main Processing

Figure 3.8 shows the main processing.

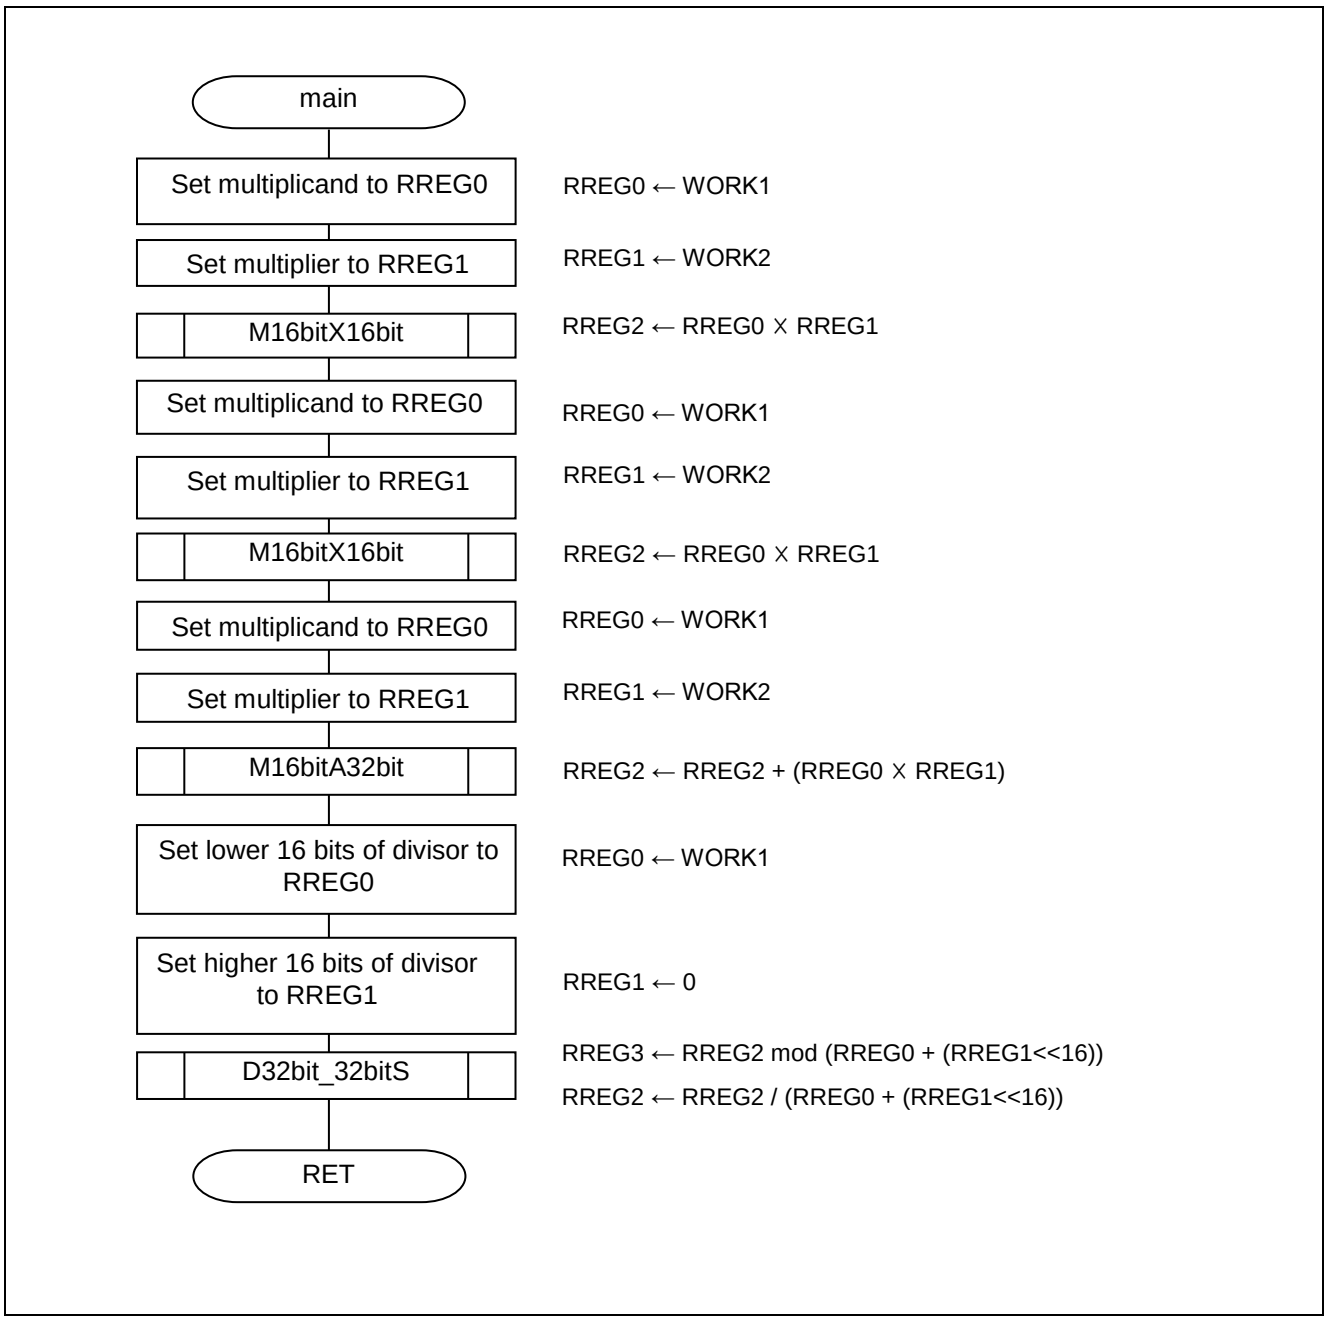

Figure 3.8 Main Processing

3.9.2 Multiplication Processing of 16 Bits Data

Figure 3.9 shows multiplication processing of 16 bits data.

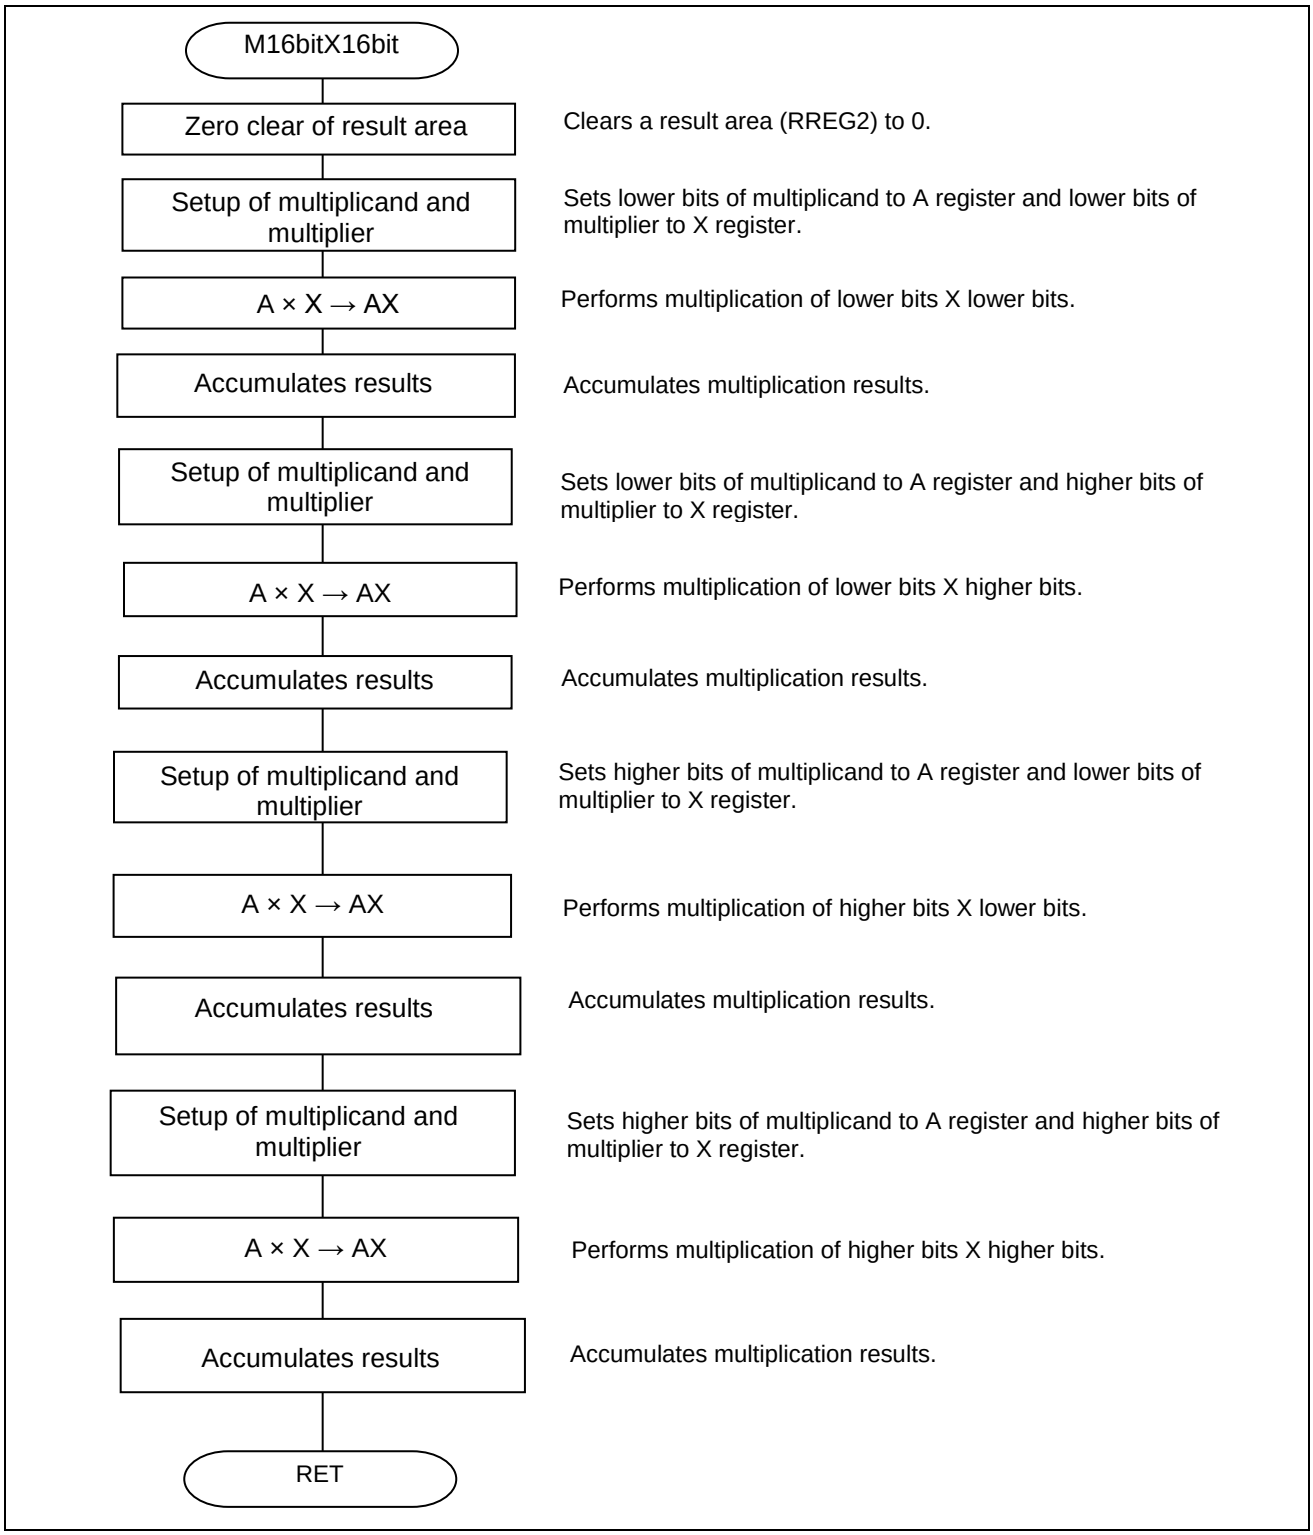
M16bitX16bit
Zero clear of result area
Clears a result area (RREG2) to 0.
Setup of multiplicand and multiplier
Sets lower bits of multiplicand to A register and lower bits of multiplier to X register.
A × X → AX
Performs multiplication of lower bits X lower bits.
Accumulates results
Accumulates multiplication results.
Setup of multiplicand and multiplier
Sets lower bits of multiplicand to A register and higher bits of multiplier to X register.
A × X → AX
Performs multiplication of lower bits X higher bits.
Accumulates results
Accumulates multiplication results.
Setup of multiplicand and multiplier
Sets higher bits of multiplicand to A register and lower bits of multiplier to X register.
A × X → AX
Performs multiplication of higher bits X lower bits.
Accumulates results
Accumulates multiplication results.
Setup of multiplicand and multiplier
Sets higher bits of multiplicand to A register and higher bits of multiplier to X register.
A × X → AX
Performs multiplication of higher bits X higher bits.
Accumulates results
Accumulates multiplication results.
RET

Figure 3.9 Multiplication Processing of 16 Bits Data

3.9.3 Multiply and Accumulation Processing

Figure 3.10 shows multiply and accumulation processing.

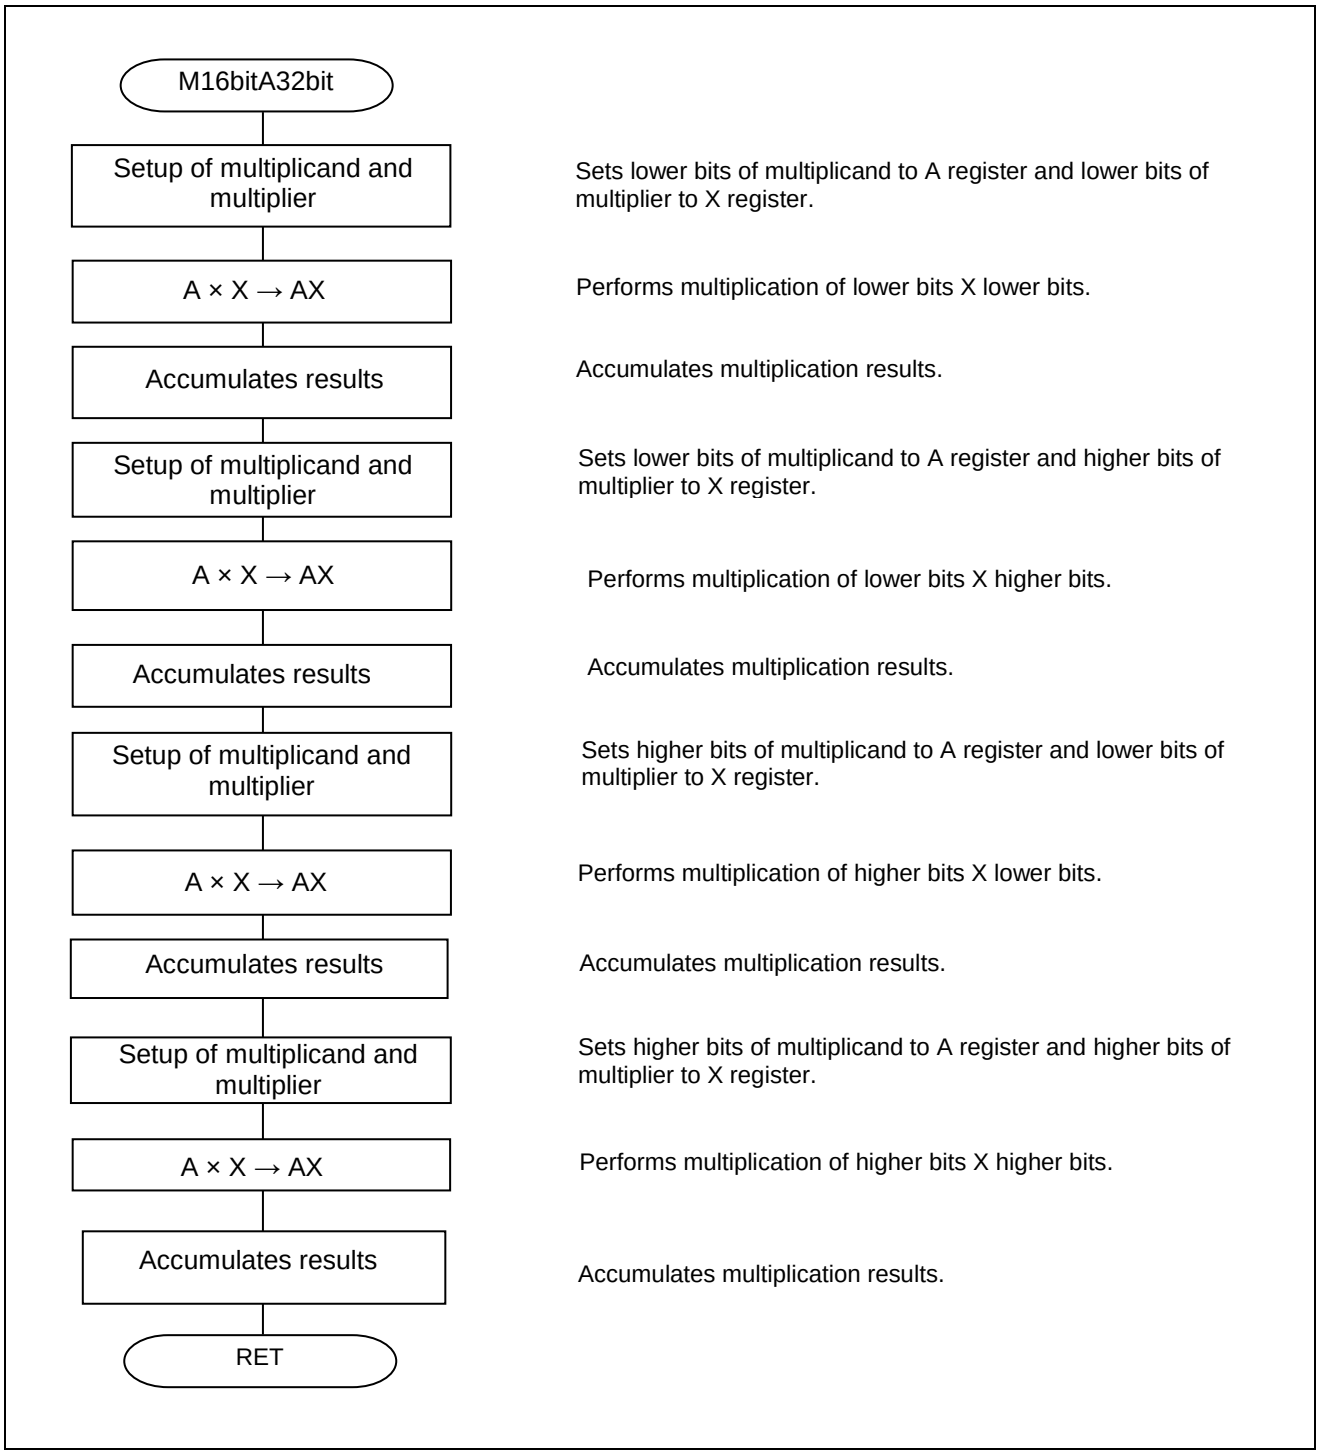
M16bitA32bit
Setup of multiplicand and multiplier
Sets lower bits of multiplicand to A register and lower bits of multiplier to X register.
A × X → AX
Performs multiplication of lower bits X lower bits.
Accumulates results
Accumulates multiplication results.
Setup of multiplicand and multiplier
Sets lower bits of multiplicand to A register and higher bits of multiplier to X register.
A × X → AX
Performs multiplication of lower bits X higher bits.
Accumulates results
Accumulates multiplication results.
Setup of multiplicand and multiplier
Sets higher bits of multiplicand to A register and lower bits of multiplier to X register.
A × X → AX
Performs multiplication of higher bits X lower bits.
Accumulates results
Accumulates multiplication results.
Setup of multiplicand and multiplier
Sets higher bits of multiplicand to A register and higher bits of multiplier to X register.
A × X → AX
Performs multiplication of higher bits X higher bits.
Accumulates results
Accumulates multiplication results.
RET

Figure 3.10 Multiply and Accumulation Processing

3.9.4 Division Processing of 32 Bits

Figure 3.11 shows division processing of 32 bits.

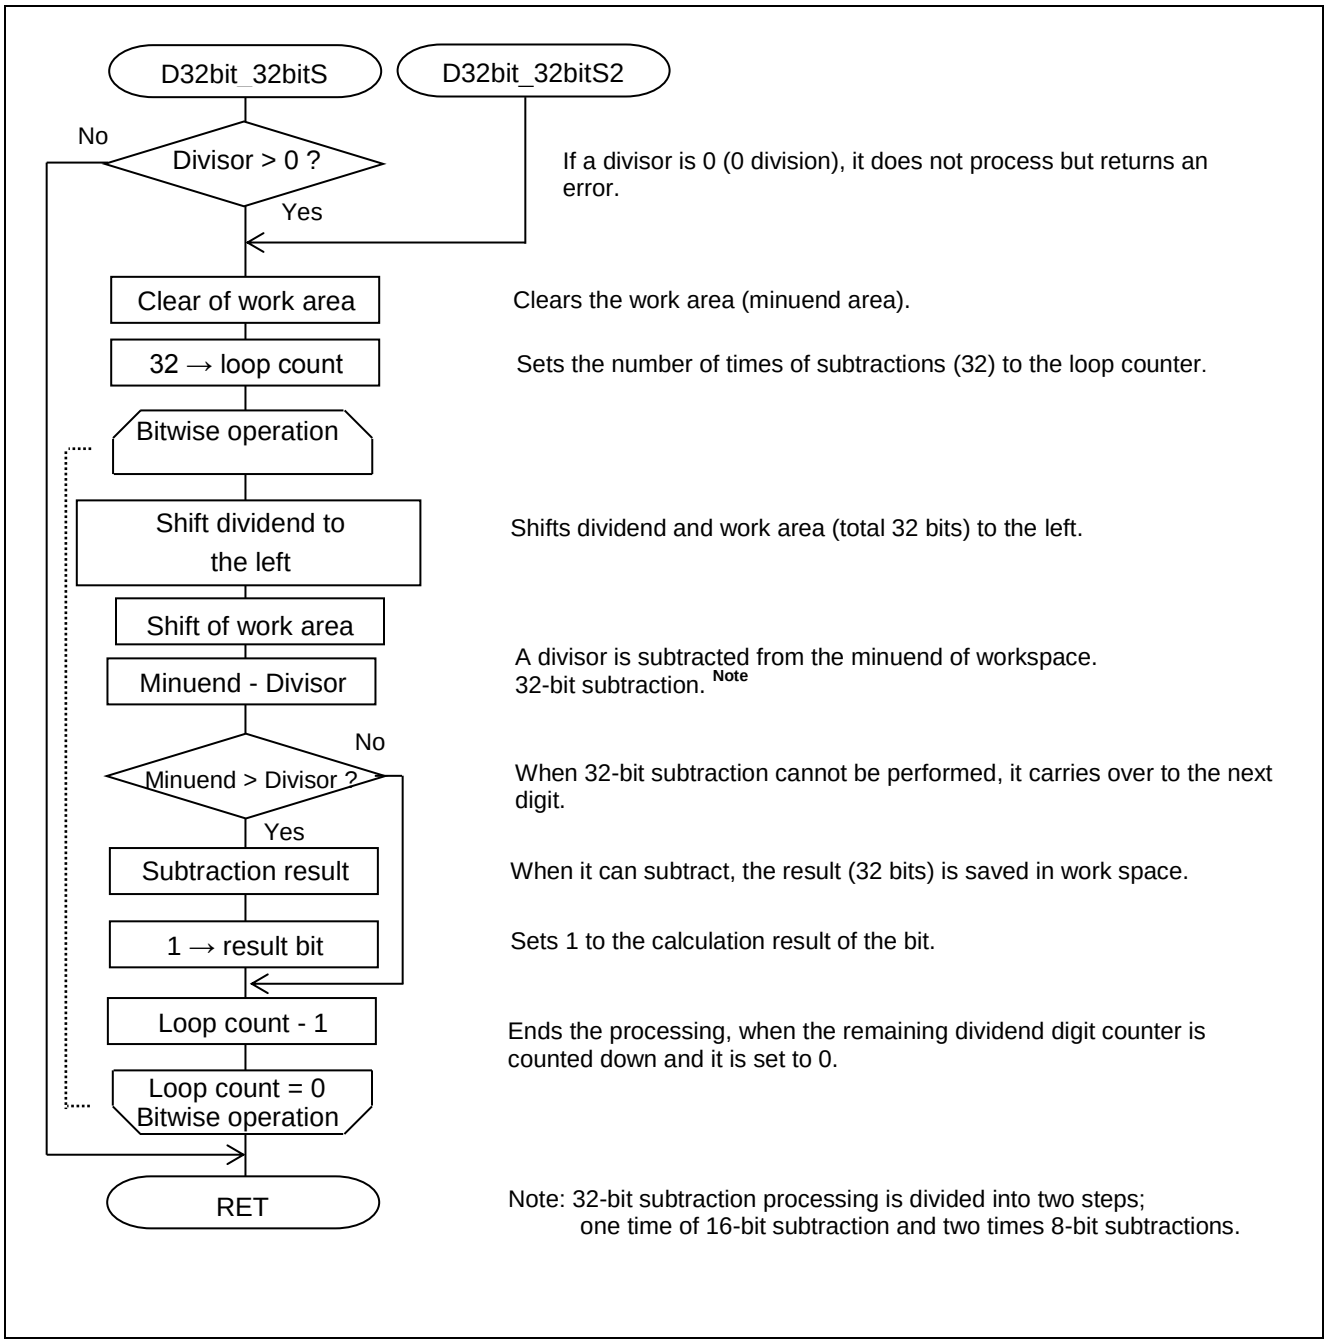
D32bit_32bitS
D32bit_32bitS2
No
Divisor > 0 ?
Yes
If a divisor is 0 (0 division), it does not process but returns an error.
Clear of work area
Clears the work area (minuend area).
32 → loop count
Sets the number of times of subtractions (32) to the loop counter.
Bitwise operation
Shift dividend to the left
Shifts dividend and work area (total 32 bits) to the left.
Shift of work area
Minuend - Divisor
A divisor is subtracted from the minuend of workspace.
32-bit subtraction. Note
No
Minuend > Divisor ?
When 32-bit subtraction cannot be performed, it carries over to the next digit.
Yes
Subtraction result
When it can subtract, the result (32 bits) is saved in work space.
1 → result bit
Sets 1 to the calculation result of the bit.
Loop count - 1
Ends the processing, when the remaining dividend digit counter is counted down and it is set to 0.
Loop count = 0
Bitwise operation
RET
Note: 32-bit subtraction processing is divided into two steps;
one time of 16-bit subtraction and two times 8-bit subtractions.

Figure 3.11 Division Processing of 32 Bits

4. Sample Code

The sample code is available on the Renesas Electronics Website.

5. Documents for Reference

RL78/G10 User's Manual: Hardware Rev.3.00 (R01UH0384EJ0300)
RL78 family User's Manual: Software Rev.2.20 (R01US0015EJ0220)
(The latest versions of the documents are available on the Renesas Electronics Website.)

Technical Updates/Technical Brochures
(The latest versions of the documents are available on the Renesas Electronics Website.)

Website and Support

Renesas Electronics Website
http://www.renesas.com/

Inquiries
http://www.renesas.com/contact/

All trademarks and registered trademarks are the property of their respective owners.

Revision History

		Description	
Rev.	**Date**	**Page**	**Summary**
1.00	Nov. 25, 2014	—	First edition issued
2.00	Mar. 31, 2015	3	e2studio and IAR information added in Table 2.1
		7	Modification of description in Explanation of M16bitX16bit
		8	Modification of description in Explanation of D32bit_32bitS
		8	Modification of description in Explanation of D32bit_32bitS2
		9	Modification of description in Figure 3.8

General Precautions in the Handling of MPU/MCU Products

The following usage notes are applicable to all MPU/MCU products from Renesas. For detailed usage notes on the products covered by this document, refer to the relevant sections of the document as well as any technical updates that have been issued for the products.

1. Handling of Unused Pins

   Handle unused pins in accordance with the directions given under Handling of Unused Pins in the manual.

   — The input pins of CMOS products are generally in the high-impedance state. In operation with an unused pin in the open-circuit state, extra electromagnetic noise is induced in the vicinity of LSI, an associated shoot-through current flows internally, and malfunctions occur due to the false recognition of the pin state as an input signal become possible. Unused pins should be handled as described under Handling of Unused Pins in the manual.

2. Processing at Power-on

   The state of the product is undefined at the moment when power is supplied.

   — The states of internal circuits in the LSI are indeterminate and the states of register settings and pins are undefined at the moment when power is supplied.
   In a finished product where the reset signal is applied to the external reset pin, the states of pins are not guaranteed from the moment when power is supplied until the reset process is completed. In a similar way, the states of pins in a product that is reset by an on-chip power-on reset function are not guaranteed from the moment when power is supplied until the power reaches the level at which resetting has been specified.

3. Prohibition of Access to Reserved Addresses

   Access to reserved addresses is prohibited.

   — The reserved addresses are provided for the possible future expansion of functions. Do not access these addresses; the correct operation of LSI is not guaranteed if they are accessed.

4. Clock Signals

   After applying a reset, only release the reset line after the operating clock signal has become stable. When switching the clock signal during program execution, wait until the target clock signal has stabilized.

   — When the clock signal is generated with an external resonator (or from an external oscillator) during a reset, ensure that the reset line is only released after full stabilization of the clock signal. Moreover, when switching to a clock signal produced with an external resonator (or by an external oscillator) while program execution is in progress, wait until the target clock signal is stable.

5. Differences between Products

   Before changing from one product to another, i.e. to a product with a different part number, confirm that the change will not lead to problems.

   — The characteristics of an MPU or MCU in the same group but having a different part number may differ in terms of the internal memory capacity, layout pattern, and other factors, which can affect the ranges of electrical characteristics, such as characteristic values, operating margins, immunity to noise, and amount of radiated noise. When changing to a product with a different part number, implement a system-evaluation test for the given product.

Notice

1. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
2. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
3. Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
4. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from such alteration, modification, copy or otherwise misappropriation of Renesas Electronics product.
5. Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The recommended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below.
   "Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots etc.
   "High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; and safety equipment etc.
   Renesas Electronics products are neither intended nor authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems, surgical implantations etc.), or may cause serious property damages (nuclear reactor control systems, military equipment etc.). You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application for which it is not intended. Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for which the product is not intended by Renesas Electronics.
6. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
7. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or systems manufactured by you.
8. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
9. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You should not use Renesas Electronics products or technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. When exporting the Renesas Electronics products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations.
10. It is the responsibility of the buyer or distributor of Renesas Electronics products, who distributes, disposes of, or otherwise places the product with a third party, to notify such third party in advance of the contents and conditions set forth in this document, Renesas Electronics assumes no responsibility for any losses incurred by you or third parties as a result of unauthorized use of Renesas Electronics products.
11. This document may not be reproduced or duplicated in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.

(Note 1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries.

(Note 2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.

RENESAS

SALES OFFICES Renesas Electronics Corporation http://www.renesas.com

Refer to "http://www.renesas.com/" for the latest and detailed information.

Renesas Electronics America Inc.
2801 Scott Boulevard Santa Clara, CA 95050-2549, U.S.A.
Tel: +1-408-588-6000, Fax: +1-408-588-6130

Renesas Electronics Canada Limited
9251 Yonge Street, Suite 8309 Richmond Hill, Ontario Canada L4C 9T3
Tel: +1-905-237-2004

Renesas Electronics Europe Limited
Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, U.K
Tel: +44-1628-585-100, Fax: +44-1628-585-900

Renesas Electronics Europe GmbH
Arcadiastrasse 10, 40472 Düsseldorf, Germany
Tel: +49-211-6503-0, Fax: +49-211-6503-1327

Renesas Electronics (China) Co., Ltd.
Room 1709, Quantum Plaza, No.27 ZhiChunLu Haidian District, Beijing 100191, P.R.China
Tel: +86-10-8235-1155, Fax: +86-10-8235-7679

Renesas Electronics (Shanghai) Co., Ltd.
Unit 301, Tower A, Central Towers, 555 Langao Road, Putuo District, Shanghai, P. R. China 200333
Tel: +86-21-2226-0888, Fax: +86-21-2226-0999

Renesas Electronics Hong Kong Limited
Unit 1601-1611, 16/F., Tower 2, Grand Century Place, 193 Prince Edward Road West, Mongkok, Kowloon, Hong Kong
Tel: +852-2265-6688, Fax: +852 2886-9022

Renesas Electronics Taiwan Co., Ltd.
13F, No. 363, Fu Shing North Road, Taipei 10543, Taiwan
Tel: +886-2-8175-9600, Fax: +886 2-8175-9670

Renesas Electronics Singapore Pte. Ltd.
80 Bendemeer Road, Unit #06-02 Hyflux Innovation Centre, Singapore 339949
Tel: +65-6213-0200, Fax: +65-6213-0300

Renesas Electronics Malaysia Sdn.Bhd.
Unit 1207, Block B, Menara Amcorp, Amcorp Trade Centre, No. 18, Jln Persiaran Barat, 46050 Petaling Jaya, Selangor Darul Ehsan, Malaysia
Tel: +60-3-7955-9390, Fax: +60-3-7955-9510

Renesas Electronics India Pvt. Ltd.
No.777C, 100 Feet Road, HAL Ⅱ Stage, Indiranagar, Bangalore, India
Tel: +91-80-67208700, Fax: +91-80-67208777

Renesas Electronics Korea Co., Ltd.
12F., 234 Teheran-ro, Gangnam-Gu, Seoul, 135-080, Korea
Tel: +82-2-558-3737, Fax: +82-2-558-5141

© 2015 Renesas Electronics Corporation. All rights reserved.

Colophon 5.0